

FLANGE ADAPTER (BF)

SDR 11/17, PE4710



COSMOIND USA

FLANGE ADAPTER (BF) DIMENSION SHEET

- Manufactured in accordance with AWWA C901 & C906, ASTM D2513 & D3261 & D3350 & F2880
- Certified to NSF/ANSI 61 and NSF/ANSI-372
- Produced by using a resin listed on the PPI TR-4
- Optional with Steel, Stainless steel or PVC backing ring which is manufactured in accordance with ASME B16.5 (2"~24") and ASME B16.47 Series A (30~48")
- For the beveled adapters for butterfly valves, Please contact sales office



Unit : inch

DN	SDR	BF Flange Adapter			Backing Ring			Weight (lbs.)	Type	Item Code
		L	T	d0	d1	h	number of holes			
2" IPS	11	5.0	0.6	3.8	4.75	0.750	4	0.39	Butt	COSB WI0900
3" IPS	11	5.6	0.8	4.8	6.00	0.750	4	0.82	Butt	COSB WI0902
4" IPS	11	6.5	1.0	6.2	7.50	0.750	8	1.60	Butt	COSB WI0903
6" IPS	11	8.3	1.4	8.2	9.50	0.875	8	3.90	Butt	COSB WI0905
8" IPS	11	8.9	1.8	10.6	11.75	0.875	8	7.12	Butt	COSB WI0906
10" IPS	11	9.5	2.2	12.8	14.25	1.000	12	11.29	Butt	COSB WI0907
12" IPS	11	10.3	2.4	15.4	17.00	1.000	12	17.66	Butt	COSB WI0908
14" IPS	11	11.3	2.6	17.1	18.75	1.125	12	23.81	Butt	COSB WI0909
16" IPS	11	12.0	2.6	19.6	21.25	1.125	16	33.05	Butt	COSB WI0910
18" IPS	11	12.0	2.6	20.6	22.75	1.250	16	37.43	Butt	COSB WI0911
20" IPS	11	12.0	2.6	23.3	25.00	1.250	20	47.56	Butt	COSB WI0912
22" IPS	11	13.0	2.6	25.4	27.25	1.375	20	61.54	Butt	COSB WI0913
24" IPS	11	14.0	2.8	27.6	29.50	1.375	20	78.42	Butt	COSB WI0914
30" IPS	11	15.0	3.6	34.25	36.00	1.375	28	124.06	Butt	COSB WI0915

The product dimensions may change for quality improvement by manufacturer

FLANGE ADAPTER (BF)

SDR 11/17, PE4710




COSMOIND USA

FLANGE ADAPTER (BF) DIMENSION SHEET

- Manufactured in accordance with AWWA C901 & C906, ASTM D2513 & D3261 & D3350 & F2880
- Certified to NSF/ANSI 61 and NSF/ANSI-372
- Produced by using a resin listed on the PPI TR-4
- Optional with Steel, Stainless steel or PVC backing ring which is manufactured in accordance with ASME B16.5 (2"~24") and ASME B16.47 Series A (30~48")
- For the beveled adapters for butterfly valves, Please contact sales office



Certified to NSF/ANSI 61 & 372

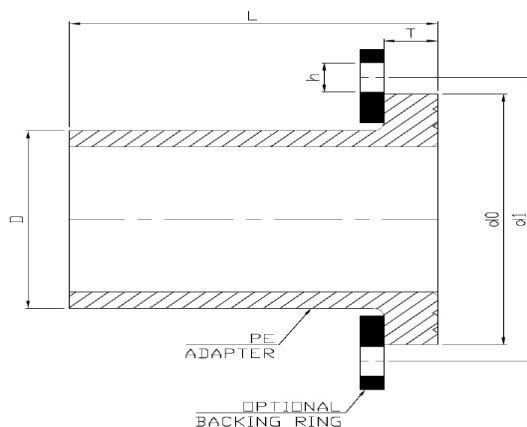

(at 73.4 °F)

GRADE	Gas		Industrial	
	SDR17	SDR11	SDR17	SDR11
2708	-	-	-	-
4710	-	-	125 psi	200 psi