

REDUCER (BF)

SDR 11/17, PE4710



COSMOIND USA

REDUCER (BF) DIMENSION SHEET

- Manufactured in accordance with AWWA C901 & C906, ASTM D2513 & D3261 & D3350
- Certified to NSF/ANSI 61 and NSF/ANSI-372
- Produced by using a resin listed on the PPI TR-4
- Produced by Injection Molding
- Suitable for Water, Gaseous, Fluids and Slurries
- Excellent chemical resistance and corrosion resistance



Unit : inch

DN		SDR	BF REDUCER			Weight (lbs.)	Type	Item Code	
MAIN	BRANCH		L	A	B			Gas	Industrial
1/2" IPS	1/2" CTS	11	1.575	0.630	0.12	0.03	Injection (Socket)	COSB GCI0500	COSB WCI0500
3/4" IPS	1/2" CTS	11	1.811	0.709	0.39	0.04	Injection (Socket)	COSB GCI0501	COSB WCI0501
3/4" IPS	1/2" IPS	11	1.693	0.748	0.20	0.04	Injection (Socket)	COSB GCI0502	COSB WCI0502
1" IPS	1/2" CTS	11	2.087	0.709	0.47	0.05	Injection (Socket)	COSB GCI0503	COSB WCI0503
1" IPS	1/2" IPS	11	1.969	0.748	0.35	0.05	Injection (Socket)	COSB GCI0504	COSB WCI0504
1" IPS	3/4" IPS	11	2.008	0.827	0.28	0.06	Injection (Socket)	COSB GCI0505	COSB WCI0505
1 1/4" IPS	1/2" IPS	11	2.165	0.709	0.47	0.08	Injection (Socket)	COSB GCI0506	COSB WCI0506
1 1/4" IPS	3/4" IPS	11	2.244	0.827	0.39	0.09	Injection (Socket)	COSB GCI0507	COSB WCI0507
1 1/4" IPS	1" IPS	11	2.244	0.906	0.31	0.10	Injection(Socket)	COSB GCI0508	COSB WCI0508
1 1/2" IPS	1/2" IPS	11	2.323	0.748	0.59	0.11	Injection(Socket)	COSB GCI0509	COSB WCI0509
1 1/2" IPS	3/4" IPS	11	2.362	0.827	0.55	0.12	Injection(Socket)	COSB GCI0510	COSB WCI0510
1 1/2" IPS	1" IPS	11	2.362	0.945	0.47	0.13	Injection(Socket)	COSB GCI0511	COSB WCI0511
1 1/2" IPS	1 1/4" IPS	11	2.362	1.024	0.35	0.14	Injection(Socket)	COSB GCI0512	COSB WCI0512
2" IPS	3/4" IPS	11	3.150	0.827	1.22	0.22	Injection(Socket)	COSB GCI0513	COSB WCI0513

The product dimensions may change for quality improvement by manufacturer

REDUCER (BF)

SDR 11/17, PE4710



COSMOIND USA


REDUCER (BF) DIMENSION SHEET

- Manufactured in accordance with AWWA C901 & C906, ASTM D2513 & D3261 & D3350
- Certified to NSF/ANSI 61 and NSF/ANSI-372
- Produced by using a resin listed on the PPI TR-4

- Produced by Injection Molding
- Suitable for Water, Gaseous, Fluids and Slurries
- Excellent chemical resistance and corrosion resistance



Certified to NSF/ANSI 61 & 372

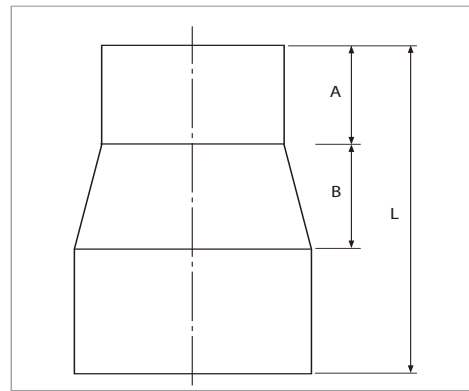

(at 73.4 °F)

GRADE	Gas		Industrial	
	SDR17	SDR11	SDR17	SDR11
2708	62.5 psi	100 psi	100 psi	160 psi
4710	80 psi	125 psi	125 psi	200 psi