

UNEQUAL TEE (EF)

SDR 11, PE2708/PE4710



COSMOIND USA


UNEQUAL TEE (EF) DIMENSION SHEET

- Manufactured in accordance with AWWA C901 & C906, ASTM D2513, D3350 and F1055
- Certified to NSF/ANSI 61, NSF/ANSI-372 and FM 1613
- Produced by using a resin listed on the PPI TR-4
- Suitable for Water, Gaseous, Fluids and Slurries
- Easy installation and Lower human error rate
- For installation, Refer to ASTM F3565 and COSMOIND's electrofusion manual

(at 73.4 °F)

GRADE	Gas		Industrial	
	SDR17	SDR11	SDR17	SDR11
2708	62.5 psi	100 psi	100 psi	160 psi
4710	80 psi	125 psi	125 psi	200 psi

Unit : inch

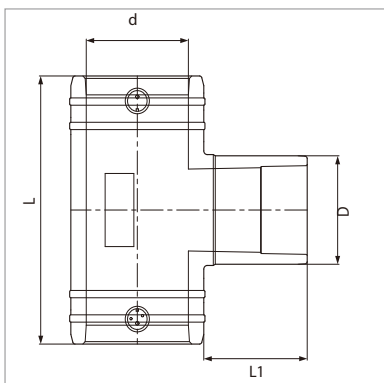

DN		SDR	EF UNEQUAL TEE		Weight (lbs.)	Item Code	
[d]	[D]		L	L1		Gas	Industrial
¾" IPS	½" IPS	11	4.213	2.362	0.28	COS 0254	COS W0262
1" IPS	½" IPS	11	4.213	2.362	0.28	COS 0263	COS W0263
1" IPS	¾" IPS	11	4.213	2.362	0.28	COS 0264	COS W0264
2" IPS	½" IPS	11	6.693	2.244	0.76	COS 0316	COS W0316
2" IPS	¾" IPS	11	6.693	2.244	0.77	COS 0317	COS W0317
2" IPS	1" IPS	11	6.693	2.717	0.77	COS 0318	COS W0318
2" IPS	1¼" IPS	11	6.693	2.835	0.82	COS 0319	COS W0319
3" IPS	½" IPS	11	8.385	2.362	1.90	COS 0325	COS W0325
3" IPS	¾" IPS	11	8.385	2.362	1.98	COS 0326	COS W0326
3" IPS	1" IPS	11	8.385	2.598	1.98	COS 0327	COS W0327
3" IPS	1¼" IPS	11	8.385	2.795	1.98	COS 0328	COS W0328
3" IPS	2" IPS	11	8.385	3.386	2.05	COS 0329	COS W0329
4" IPS	½" IPS	11	10.906	2.362	3.26	COS 0337	COS W0337
4" IPS	¾" IPS	11	10.906	2.362	3.35	COS 0338	COS W0338
4" IPS	1" IPS	11	10.906	2.362	3.35	COS 0339	COS W0339



Certified to NSF/ANSI 61 & 372

APPROVED

The product dimensions may change for quality improvement by manufacturer

UNEQUAL TEE (EF)

SDR 11, PE2708/PE4710



COSMOIND USA


UNEQUAL TEE (EF) DIMENSION SHEET

- Manufactured in accordance with AWWA C901 & C906, ASTM D2513, D3350 and F1055
- Certified to NSF/ANSI 61, NSF/ANSI-372 and FM 1613
- Produced by using a resin listed on the PPI TR-4
- Suitable for Water, Gaseous, Fluids and Slurries
- Easy installation and Lower human error rate
- For installation, Refer to ASTM F3565 and COSMOIND's electrofusion manual

(at 73.4 °F)

GRADE	Gas		Industrial	
	SDR17	SDR11	SDR17	SDR11
2708	62.5 psi	100 psi	100 psi	160 psi
4710	80 psi	125 psi	125 psi	200 psi

Unit : inch

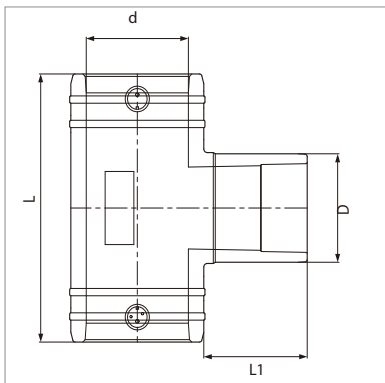

DN		SDR	EF UNEQUAL TEE		Weight (lbs.)	Item Code	
[d]	[D]		L	L1		Gas	Industrial
4" IPS	1¼" IPS	11	10.906	3.543	3.88	COS 0341	COS W0341
4" IPS	2" IPS	11	10.906	3.583	3.96	COS 0342	COS W0342
4" IPS	2 ½" IPS	11	10.906	3.740	4.04	COS 0343	COS W0343
4" IPS	3" IPS	11	10.906	3.819	4.15	COS 0344	COS W0344
6" IPS	¾" IPS	11	14.961	3.543	8.27	COS 0355	COS W0355
6" IPS	1" IPS	11	14.961	3.543	8.33	COS 0356	COS W0356
6" IPS	1¼" IPS	11	14.961	3.543	9.57	COS 0357	COS W0357
6" IPS	2" IPS	11	14.961	3.543	9.66	COS 0358	COS W0358
6" IPS	3" IPS	11	14.961	4.173	10.21	COS 0359	COS W0359
6" IPS	4" IPS	11	14.961	4.331	10.36	COS 0370	COS W0370
8" IPS	4" IPS	11	18.464	4.331	21.47	COS 0385	COS W0385
8" IPS	6" IPS	11	18.464	5.394	22.00	COS 0390	COS W0390
12" IPS	4" IPS	11	18.386	4.409	40.50	COS 0391	COS W0391
12" IPS	6" IPS	11	18.386	5.118	42.77	COS 0392	COS W0392
12" IPS	8" IPS	11	22.047	6.024	59.75	COS 0393	COS W0393



Certified to NSF/ANSI 61 & 372

APPROVED

The product dimensions may change for quality improvement by manufacturer